

<b>Housing</b>	Aluminium
<b>RAL colour</b>	9004/9003 (Black/White), 9004/1036 (Black/Gold)
<b>Fixture type</b>	Surface mounted
<b>Module</b>	Citizen LED
<b>Driver</b>	Osram TRIAC dimmable driver
<b>Lumen output</b>	1500lm
<b>CCT</b>	2700K
<b>CRI</b>	>90Ra
<b>Beam angles</b>	50°
<b>Expected Lifetime</b>	>40.000h (L70/B30)
<b>Photobiological safety</b>	RG1 unlimited
<b>Power factor</b>	> 0.9
<b>UGR</b>	< 19
<b>Colour consistency</b>	3 SDCM
<b>Warranty</b>	3 years warranty on LED module and driver

Also available with Powergear® 3-phase track adapter

Net Weight	Dimensions carton L x W x H	Qty outer carton
850 grams	15 x 15 x 15 cm	14

## LED MODULES

Standard



## OPTIONS

Dimmable




## LED MODULE OPTIONS

Description	Lumen	Watt	Lm/W	CCT	CRI	Description	Lumen	Watt	Lm/W	CCT	CRI
Citizen LED	1500lm	20W	75	927	>90Ra						

LED modules  
 Standard: CRI>80 and >90 in CCT 2700K, 3000K, 4000K  
 Premium White (PW): for fresh white and depth of colour in retail environments  
 1) Lumen output of LED module (COB)  
 2) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.  
 The power of the complete fixture will be slightly higher due to the power consumption of the driver.  
 3) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.  
 Technical data can be changed by Internova without prior notice.

**It all starts with light**

## ARTICLE CODE STRUCTURE

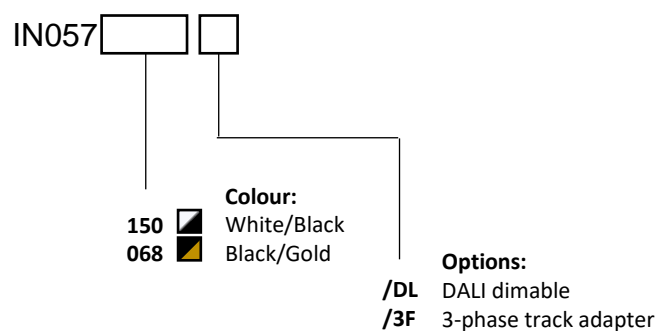

## POLAR DIAGRAMS

50°

